



PRODUCT DESCRIPTION

Recessed PAR20/PAR16 downlight luminaire with 3/4" Alzak deep cone aperture with tempered glass to protect lamp against water. Fixture has 55° visual cutoff to lamp and lamp image. Sealed Air-Loc housing eliminates leak-paths to ensure maximum energy savings and controls plenum sound transmission. IC rated housing for use in direct contact with insulation.

PRODUCT SPECIFICATIONS

Reflector .040" aluminum parabolic reflector in clear, gold, black, haze, or wheat haze Alzak finish provides 55° lamp and lamp image cut-off.

Trims Style Trim Ring, Self Flanged and Flush Mount reflectors utilize torsion spring retention for tight, secure fit to ceiling • Trim ring features beveled knife edge for clean ceiling interface • Self Flanged reflectors with polished or optional white painted flange • For flush mount installations in drywall ceilings use the FMA4 flush mount adapter • For flush mount installations in wood, stone, or tile ceilings the FMA4-SC*** must be used (specify ceiling thickness and adapter finish).

Socket Medium base porcelain socket with nickel plated copper screw shell.

Lamp One 50W PAR20 or 45W PAR16 lamp.

Codes/Labels UL and cUL listed for direct contact with insulation, through-branch wiring, wet locations • Meets energy code Air Leakage requirements per ASTM E283 • Product thermally protected • Union made.

Proprietary Bar Hanger System Patent pending Pro-VI™, telescoping bar hanger system with locking set screws, permits quick placement of housing within 24" O.C. joists or suspended ceilings

- Robust bar eliminates flexing regardless of fixture position
- Integral T-bar notch with locking tabs secures housing to suspended ceiling grid
- Captive bugle-headed ring shank nail for quick one-step installation
- Bar Hanger foot aligns to bottom of construction joist and breaks away for use in suspended ceilings.

Junction Box Rated for 4 No. 12 AWG 90° C through branch circuit conductors and includes (6) 1/2", (1) 3/4", and (4) Non-metallic sheathed cable knock-outs • Push-in electrical connectors for field connections.

Housing/Mounting Frame Steel plaster frame and aluminum housing painted black for visually dark interior • V-Notch in plaster frame aids fixture alignment during installation • Patent pending Tru-Line™ Adjustment Mechanism featuring +/- 1/2" translation aids fixture alignment after installation, prior to drywall.

Ceiling Thickness 1/2" - 7/8" ceiling standard • For thicker ceilings, order CTA4N-125 (7/8"-1 1/4"), CTA4N-163 (1 1/4"-1 5/8") or CTA4N-200 (1 5/8"-2") • CTA4N not required for wood, stone, or tile flush mount applications.

RECESSED DOWNLIGHT
3-1/4" SHOWER LIGHT
 IC Rated, 50W PAR20 or
 45W PAR16
IC13N, 432N TRIM

Project: _____


Fixture Type: _____

Location: _____

Contact/Phone: _____



DIMENSIONS

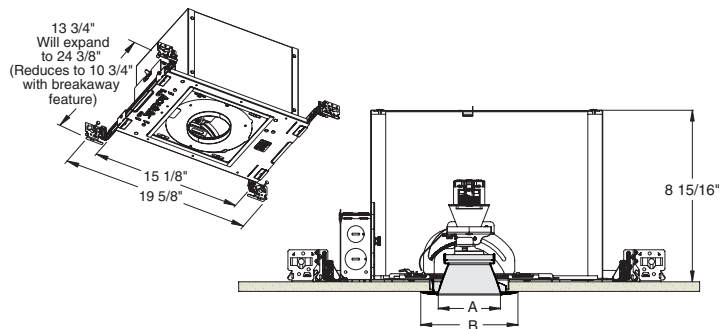

4 1/4" CEILING CUTOUT
 (REFER TO INSTRUCTION SHEET FOR
 FLUSH MOUNT CEILING CUTOUT)

	A	B
Trim Ring	3 1/4"	5"
Self Flanged	3 3/8"	4 5/8"
Flush Mount	3 3/8"	3 7/8"

Housings

Catalog #	Description
IC13N	Line Voltage Recessed

Flush Mount Adapters

FMA4	Drywall Ceiling Adapter
FMA4-SC087-WH	Wood, Stone, Tile, 1/2"-7/8" Thick Ceiling, Adapter, White
FMA4-SC087-BL	Wood, Stone, Tile, 1/2"-7/8" Thick Ceiling, Adapter, Black
FMA4-SC125-WH	Wood, Stone, Tile, 7/8"-1 1/4" Thick Ceiling, Adapter, White
FMA4-SC125-BL	Wood, Stone, Tile, 7/8"-1 1/4" Thick Ceiling, Adapter, Black
FMA4-SC163-WH	Wood, Stone, Tile, 1 1/4"-1 5/8" Thick Ceiling, Adapter, White
FMA4-SC163-BL	Wood, Stone, Tile, 1 1/4"-1 5/8" Thick Ceiling, Adapter, Black

Misc. Accessories

CTA4N-125	1 1/4" Thick Ceiling Adapter
CTA4N-163	1 5/8" Thick Ceiling Adapter
CTA4N-200	2" Thick Ceiling Adapter

To order, specify catalog number.

Downlight Shower Trim



Trim Ring ¹	Self Flanged ²	Flush Mount ³	Description
432NB-WH	432NB-SF	432NB-FM	Black Cone
432NC-WH	432NC-SF	432NC-FM	Clear Cone
432NG-WH	432NG-SF	432NG-FM	Gold Cone
432NHZ-WH	432NHZ-SF	432NHZ-FM	Haze Cone, White Ring
432NHZ-SC	-	-	Haze Cone
432NWHZ-WH	432NWHZ-SF	432NWHZ-FM	Wheat Haze Cone, White Ring
432NWHZ-ABZ	-	-	Wheat Haze Cone

¹Trim Ring Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White.

²For self flanged reflector with optional white painted flange, replace "SF" suffix with "SEWH".

³Flush Mount trims must be used with Flush Mount Adapter, ordered separately.

Product specifications subject to change without notice.



PHOTOMETRIC REPORT

Catalog Number: IC13N (432N-WH)

Test Number: PT12092908

Total Luminaire Efficiency: 74.9%

Luminaire Spacing Criteria: 0.38

Luminaire: Clear specular Alzak® lensed shower light trim.

Lamps: One 45PAR16/FL27, rated at 420 total lumens.


Initial Footcandles

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Footcandles Beam Edge	Beam Diameter
6'	38.6	18.5	2.0'
7'	28.4	13.6	2.3'
8'	21.7	10.4	2.7'
9'	17.2	8.2	3.0'
10'	13.9	6.7	3.3'
11'	11.5	5.5	3.7'
12'	9.6	4.6	4.0'
13'	8.2	3.9	4.3'
14'	7.1	3.4	4.6'
15'	6.2	3.0	5.0'

AVERAGE INITIAL FOOTCANDLES

Reflectances: 80% Ceiling, 50% Walls, 20% Floors

Luminaire Spacing	Room Cavity Ratio		
	RCR1	RCR3	RCR5
4' x 4'	22	20	18
5' x 5'	14	13	12
6' x 6'	10	9	8
7' x 7'	8	7	7
8' x 8'	6	6	5
9' x 9'	5	4	4
10' x 10'	4	3	3
12' x 12'	2	2	2



Candlepower Distribution (Candelas)

Angle	Candela	Lumens
0°	1390	
5°	1146	109
15°	414	117
25°	114	53
35°	29	18
45°	15	12
55°	6	5
65°	0	0
75°	0	0
85°	0	0

Luminance Data

Ang in Deg	Footlamberts	Candela/M ²
45	1021	3499
55	476	1631
65	0	0
75	0	0
85	0	0

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixture
0-30°	279	66.5	88.8
0-40°	297	70.8	94.6
0-60°	314	74.9	100.0
0-90°	314	74.9	100.0
90-180°	0	0.0	0.0
0-180°	314	74.9	100.0

COEFFICIENTS OF UTILIZATION - % (Zonal Cavity Method)

Effective Floor Reflectance 20%

PCC	80				70				50				30				10				0				
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30
0	89	89	89	89	87	87	87	87	83	83	83	80	80	80	76	76	76	75	75	75	75	75	75	75	75
1	86	84	83	81	84	83	81	80	80	79	78	77	76	75	74	74	73	72	72	72	72	72	72	72	72
2	83	80	78	76	81	79	77	75	76	75	73	74	73	72	72	71	70	69	69	69	69	69	69	69	69
3	80	76	73	71	79	75	73	70	73	71	69	72	70	68	70	68	67	66	66	66	66	66	66	66	66
4	77	73	70	67	76	72	69	67	71	68	66	69	67	65	68	66	65	64	64	64	64	64	64	64	64
5	75	70	67	64	74	69	66	64	68	65	63	67	65	63	66	64	62	61	61	61	61	61	61	61	61
6	72	67	64	61	71	67	63	61	66	63	61	65	62	60	64	62	60	59	59	59	59	59	59	59	59
7	70	65	61	59	69	64	61	59	63	61	59	63	60	58	62	60	58	57	57	57	57	57	57	57	57
8	68	63	59	57	67	62	59	57	61	59	57	61	58	56	60	58	56	55	55	55	55	55	55	55	55
9	66	61	57	55	65	60	57	55	60	57	55	59	56	55	59	56	55	54	54	54	54	54	54	54	54
10	64	59	56	53	63	58	55	53	58	55	53	57	55	53	57	55	53	52	52	52	52	52	52	52	52

