



d^{series}

D-Series Size 1 LED Wall Luminaire



Catalog
Number

Notes

Type


Hit the Tab key or mouse over the page to see all interactive elements.

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, E20WC)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	E20WC Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

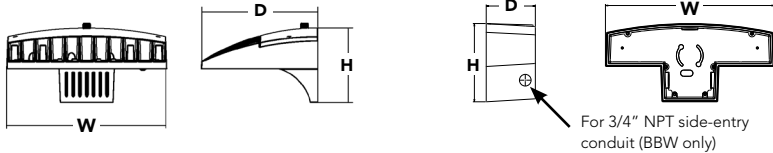

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and significant energy savings, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED P2 40K 70CRI T3M MVOLT SRM DDBTXD

DSXW1 LED		CCT		CRI		Distribution		Voltage	Mounting	Control Options		
Series	Lumen Package											
DSXW1 LED	P1 2000 Lumens	27K	2700K	70CRI	70CRI	T2S	Type 2 Short	MVOLT	Shipped included	Shipped installed		
	P2 2200 Lumens	30K	3000K	80CRI	80CRI ²	T2M	Type 2 Medium	120 ⁵			SRM	Surface mounting bracket
	P3 3200 Lumens	35K	3500K	AMCRI	Amber CRI	T3LG	Type 3 Low Glare ⁴	208 ⁵	BBW	Surface-mounted back box (for conduit entry) ⁷	DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)
	P4 4300 Lumens	40K	4000K			T3M	Type 3 Medium	240 ⁵			PIR	180° motion/ambient light sensor, <15' mtg ht ⁹
	P5 5200 Lumens	50K	5000K			T4M	Type 4 Medium	277 ⁵			PIRH	180° motion/ambient light sensor, 15-30' mtg ht ⁹
	P6 7200 Lumens	57K	5700K			TFTM	Forward Throw Medium	347 ^{5,6}			PIR1FC3V	Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁹
	P7 10000 Lumens	AMBPC	Amber PC ³				BLC3	Back Light Control Type 3 ⁴	480 ^{5,6}			PIRH1FC3V
AMBLW		Amber LW ^{1,3}				BLC4	Back Light Control Type 4 ⁴	HVOLT ⁶			E20WC	20 Watt Emergency battery backup (includes external component enclosure), CA Title 20 Compliant ¹⁰
											E10WH	10 Watt Emergency battery backup (includes external component enclosure), CA Title 20 compliant ¹⁰

Other Options	Finish (required)
Shipped installed	Shipped separately¹²
SF Single fuse (120, 277 or 347V) ^{5,11}	BSW Bird-deterrent spikes
DF Double fuse (208, 240 or 480V) ^{5,11}	VG Vandal guard
HS House-side shield ¹²	DDL Diffused drop lens
SPD Separate surge protection	
	DDBXD Dark bronze
	DBLXD Black
	DNAXD Natural aluminum
	DWHXD White
	DSSXD Sandstone
	DDBTXD Textured dark bronze
	DBLXD Textured black
	DNATXD Textured natural aluminum
	DWHGXD Textured white
	DSSTXD Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXWVIG U	Vandal guard accessory

NOTES

- Only available with P1 and P6 Packages.
- Not available with 57K.
- Only Available with AMCRI.
- Not available with HS Option.
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Not available with P1 package. Not available with motion/ambient light sensors (PIR or PIRH). Not Available with DMG.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory. Not Available with E20WC or E10WH.

- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3. Not available with DMG.
- Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with SF and DF fusing. Not available with 347, 480, HVOLT voltage options. Emergency components located in back box housing. Not available with SPD.
- Not available with E20WC and E10WH.
- Also available as a separate accessory; see Accessories information.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Contact factory for performance data on any configurations not shown here.

Package	Dist. Type	System Watts	30K, 70CRI		40K, 70CRI		50K, 70CRI	
			Lumens	LPW	Lumens	LPW	Lumens	LPW
P1	T2M	12	1,840	149	1,965	159	1,993	161
	T3M	12	1,786	144	1,908	154	1,934	156
	T4M	12	1,821	147	1,946	157	1,973	159
	TFTM	12	1,816	147	1,940	157	1,967	159
	BLC4	12	1,382	112	1,476	119	1,497	121
P2	T2M	15	2,189	150	2,339	160	2,371	163
	T3M	15	2,126	146	2,271	156	2,302	158
	T4M	15	2,168	149	2,316	159	2,348	161
	TFTM	15	2,161	148	2,309	158	2,341	161
	BLC4	15	1,645	113	1,757	121	1,781	122
P3	T2M	21	3,064	146	3,273	155	3,318	158
	T3M	21	2,974	141	3,177	151	3,222	153
	T4M	21	3,033	144	3,240	154	3,285	156
	TFTM	21	3,024	144	3,231	153	3,275	156
	BLC4	21	2,302	109	2,459	117	2,493	118
P4	T2M	29	3,997	139	4,269	149	4,329	151
	T3M	29	3,880	135	4,145	145	4,203	147
	T4M	29	3,957	138	4,227	147	4,286	149
	TFTM	29	3,945	138	4,214	147	4,273	149
	BLC4	29	3,002	105	3,207	112	3,252	113
P5	T2M	37	4,977	134	5,317	143	5,391	145
	T3M	37	4,832	130	5,162	139	5,233	141
	T4M	37	4,928	132	5,264	142	5,337	144
	TFTM	37	4,913	132	5,248	141	5,321	143
	BLC4	37	3,739	101	3,994	107	4,050	109
P6	T2M	48	6,867	142	7,335	152	7,437	154
	T3M	48	6,667	138	7,122	148	7,220	150
	T4M	48	6,798	141	7,262	151	7,363	153
	TFTM	48	6,778	140	7,241	150	7,341	152
	BLC4	48	5,158	107	5,511	114	5,587	116
P7	T2M	73	9,819	135	10,490	145	10,635	147
	T3M	73	9,533	131	10,184	140	10,325	142
	T4M	73	9,722	134	10,385	143	10,529	145
	TFTM	73	9,693	134	10,354	143	10,498	145
	BLC4	73	7,377	102	7,880	109	7,989	110

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

Electrical Load

Performance Package	LEDs	Drive Current (mA)	System Watts	Current (A)					
				120V	208V	240V	277V	347V	480V
DSXW1 P1	10	375	12	0.10	0.06	0.05	0.04	-	-
DSXW1 P2	10	450	15	0.12	0.07	0.06	0.05	0.04	0.03
DSXW1 P3	10	650	21	0.18	0.10	0.09	0.08	0.06	0.05
DSXW1 P4	10	875	29	0.24	0.14	0.12	0.10	0.08	0.06
DSXW1 P5	10	1125	37	0.30	0.18	0.16	0.14	0.11	0.08
DSXW1 P6	20	750	48	0.39	0.24	0.20	0.18	0.14	0.10
DSXW1 P7	20	1150	73	0.60	0.36	0.31	0.27	0.21	0.15

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED P7** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.91	0.82

Motion Sensor Default Settings


Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*For use when motion sensor is used as dusk to dawn control

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isofootcandle plots for the DSXW1 LED P4 40K. Distances are in units of mounting height (20').

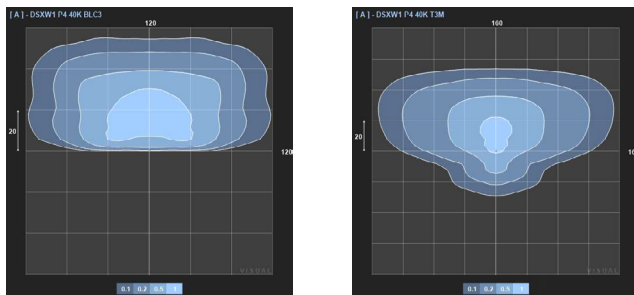

Options and Accessories



T3M (left)



HS - House-side shields



BSW - Bird-deterrent spikes



VG - Vandal guard



DDL - Diffused drop lens

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. IP66 rated light engine.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in multiple CCTs and CRIs including Amber for specialized applications.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 6kV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

Five-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

