

RAB LIGHTING

VAN2F13

JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Medium size fixture: 26 and 32 watt compact fluorescent lamp. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor.

SPECIFICATIONS

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel

Refractor:

Injection molded polycarbonate, designed for maximum structural strength

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver

Sockets:

Plug-in type, thermoplastic

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Ballast Minimum Starting Temperature:

0

F13:

Compact Fluorescent 13W

Lens:

Clear

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Photocontrol:

Button Photocontrol requires mounting back box. Product number VAN2BB

Color:


Clear

Weight:

2.1

PHOTOMETRIC

75w Incandescent @ 8' Mounting Height

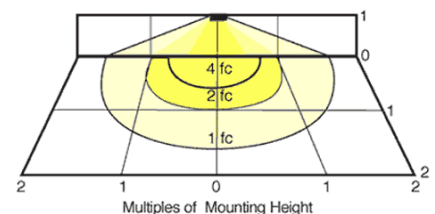

Mounting Height	Multiplier
8'	1.0
9'	.8
10'	.7
12'	.4
14'	.3

Multiplier	Watts Incan	CFL
1.5	26	1.5
.2	32	.2
1.0	75	1.0

ORDERING INFORMATION

Compact Fluorescent
Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
13	13W	GX23	NPF 120V Quad

Starting Amps/ Operating Amps			
120V	208V	240V	277V
.4/3			

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
16		825	10000

Factory Installed Options
Add suffix to Catalog Number

Swivel Photocontrol (/PCS)
Mini Motion Sensor (/MS)

Button Photocontrol (Requires Mounting Back Box) (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2009